


PixLUM™ Instructions for use

PixLUM™ is an exclusive PIXLUM® brand.


The Range (bulb not included)

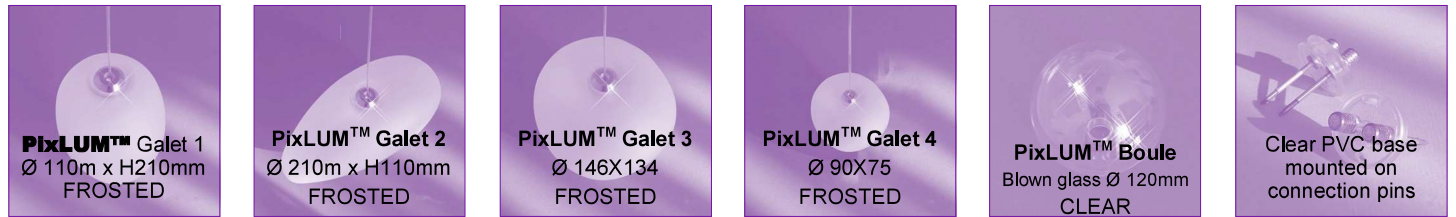

Characteristics

PixLUM™ lamps are designed only for use with **PIXLUM®** products.

12 Volts
6 Watts max.
Bornier G4 - GU5.3
Ampoule
Ø extérieur max.
20mm




TBTS 12 Volts **IP20** **RoHS COMPLIANT**
6 Watts MAX. - NF EN 60 598-1 and 60 598-2-1

Setup POWER OFF



How to shorten the lamp's cables (optional):

- ▶ Unscrew the PVC base's locknuts.
- ▶ Remove pins and cable.
- ▶ Cut cable to desired length.
- ▶ Strip both cable strands with an automatic wire stripper over 5-7 mm.
- ▶ Twist both cables and insert them into the pins' holes.
- ▶ Insert the pins into the base (hollow side). Fasten the locknuts.
- ▶ Test your installation's proper functioning by connecting your lamp directly to the transformer to check if the current runs through your lamp properly and to ensure that it turns on before inserting it into the panel.






Lamp setup:

- ▶ Insert the bulb into the socket then carefully screw the glass piece onto the brass socket.

- ▶ **PixBOARD™ plaster:** place the PVC base and its two pins where you wish to insert the lamp. Carefully mark the plaster board's surface. Pierce a hole on the marked locations using a **PixTOOL™** single tool.

All boards: Take the PVC base with both hands to insert the pins all the way into the panels. Take care to insert them straight into the board without swinging your hand.



- ▶ In order to ensure the proper adherence of your lamp into the panel, insert both side pins into the appropriate sideways holes of the lamp's base. When used on **PixBOARD™** plaster boards, use a mallet to carry out this insertion.

- ▶ Carefully let the lamps hang and make sure they don't bump into one another.

In case of malfunction:



- ▶ Make sure the power is on.
- ▶ Make sure the bulb isn't blown.
- ▶ Connect the lamp directly to a transformer to make sure it works properly.
- ▶ Insert the **PixLUM™** lamp into the board again, but a few millimeters away from the previous holes.

References et description



Description	Référence	Dimensions	Finition	Long. Câble	Tension	P. Max	Qté
PixLUM Galet 1*	51420011	Ø 110m x H210mm	Frosted	1 m	12 Volts	6 Watts	x1
PixLUM Galet 2*	51420021	Ø 210m x H110mm	Frosted				x1
PixLUM Galet 3*	51410051	Ø 146X134	Frosted				x1
PixLUM Galet 4*	51420041	Ø 90X75	Frosted				x1
PixLUM Boule* verre soufflé	51420031	Ø 120mm	Clear				x1
PVC base + 2 pins + 2 nuts	53000001	-	-	-	-	-	x1
Additional cable (sold by the meter)	54000001	-	-	-	-	-	x1m

* Lightbulb not include